

AL

Fully Insulated Premium Passthrough Dishwasher – 500mm Rack

W 750mm x D 795mm x H 1525mm

With the fastest complete cycle time of 40 seconds, the AL delivers unrivalled single tank passthrough dishwasher performance and capacity, washing up to 1400 plates per hour.

Standard Features

- Thermal & acoustic insulation
- 2.6 litres per cycle hot water consumption
- Up to 1400 plates per hour
- Assured final rinse – 316 grade stainless steel break tank and rinse booster pump
- Reverse osmosis compatible for spot free results
- Electronic controls with enhanced functionality
- Multi-cycle options – fast 40, 60 and 90 second cycles with manual cycle mode, Ecopower, Soft Start, Self Cleaning cycle and QuikStart
- Service diagnostics
- Enhanced filtration with hot rinse retention and active waste removal
- Dual chemical injectors
- Drain pump
- Dual stainless steel upper and lower wash & rinse arms with removable cleaning caps
- 6kW rinse heating
- 430mm high wash chamber clearance
- Suits 500mm international standard racks
- QuikConnect
 - Water supply hose
 - Dual chemical injector lines
 - Drain pump outlet hose
- 15A 3 Phase N + E only
- Includes adjustable 200mm high legs
- No commissioning required

Includes:

- 2 x 600 70028 – 500mm dish racks
- 1 x 600 70029 – 500mm cup rack
- 1 x C660503 – cutlery container
- 1 x C660508 – cutlery basket



AL

Fully Insulated Premium Passthrough Dishwasher – 500mm Rack

Designed and manufactured by
WASHTECH®

ISO9001
All Starline products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.


In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

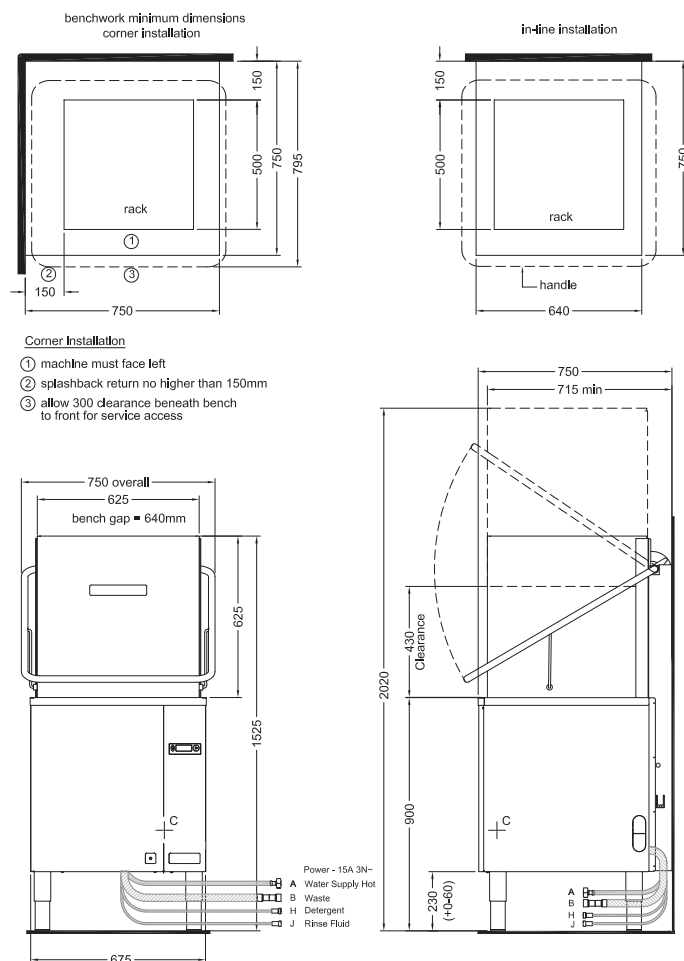

A Hot Water	temperature 65°C	Dimensions	Width 750mm
connection	3/4" male; hose supplied	Depth	795mm
pressure	200-300kPa	Height	1525mm
flow	15 litres per min	Weight	120kg
quality	potable & soft	Packed Dimensions	Width 800mm
backflow prevention	atmospheric vacuum breaker	Depth	950mm
		Height	1475mm
B Waste	connection hose supplied for 38mm	Weight	140kg
	open standpipe 750 high	Cubicmetres	1.1m ³
	or connection to sink trap		
C Electrical	3 phase 400-415V 50Hz 15 amp	Refer operator manual for complete installation instructions	



On call service where you are.

Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.

STARLINE SERVICE 09 829 0923

