

## Starline UD

Professional Undercounter Dishwasher/Glasswasher – 500mm rack  
**W 575mm x D 595mm x H 845mm**

The Starline UD is a versatile and highly efficient undercounter dishwasher combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the UD provides excellent wash results while being light on operating costs and the environment.

The UD's intuitive electronic controls provide Soft Start, EcoPower, cycle customisation, chemical adjustability and immediate fault diagnosis. Capable of washing 1,500 glasses or 1,080 plates per hour, the UD is the perfect machine for busy cafes, childcare centres or office kitchens. Equipped with break tank, up-rateable rinse elements for rapid recovery when running on cold water, and rinse pump the new UD is designed to operate efficiently on cold RO water as part of an efficient polish free glasswashing solution.

Since 1981 Washtech dishwashers have been constructed in New Zealand from heavy-duty stainless steel, and are engineered specifically for New Zealand conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your UD will not let you down.

### Special Features


- Polish-free glasswashing compatible
- Assured rinse – fitted with break tank and rinse pump for optimal sanitising rinse results even when running on cold and/or low pressure inlet water

### Standard Features

- 60, 120 and 180 second cycles
- Capacity of up to 1,500 glasses / 1,080 plates per hour
- Low water consumption of 2.4 litres per cycle
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including double filtration via scrap trays and separate wash inlet filter
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
- Self-cleaning cycle
- EcoPower – reduced temperatures and energy consumption when machine is idle
- Insulated door – reduced noise and heat emissions

### Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)



## Starline UD

washtech.co.nz

### Washtech Limited

PO Box 90-548  
Auckland 1142

414 Rosebank Road  
Avondale  
Auckland 1026  
NEW ZEALAND

(09) 829 0930  
info@washtech.co.nz




service@washtech.co.nz

For 24/7 service and support:  
**0800 WASHTECH**

Washtech provides full service and support 24 hours a day, 7 days a week, with a comprehensive nationwide network of authorised service providers.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© 2020 Washtech Limited  
Version: SUD00312007

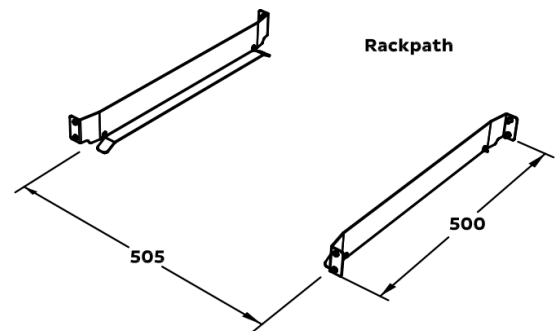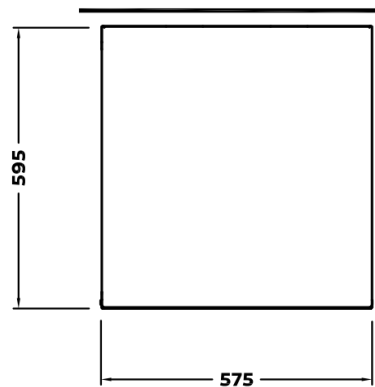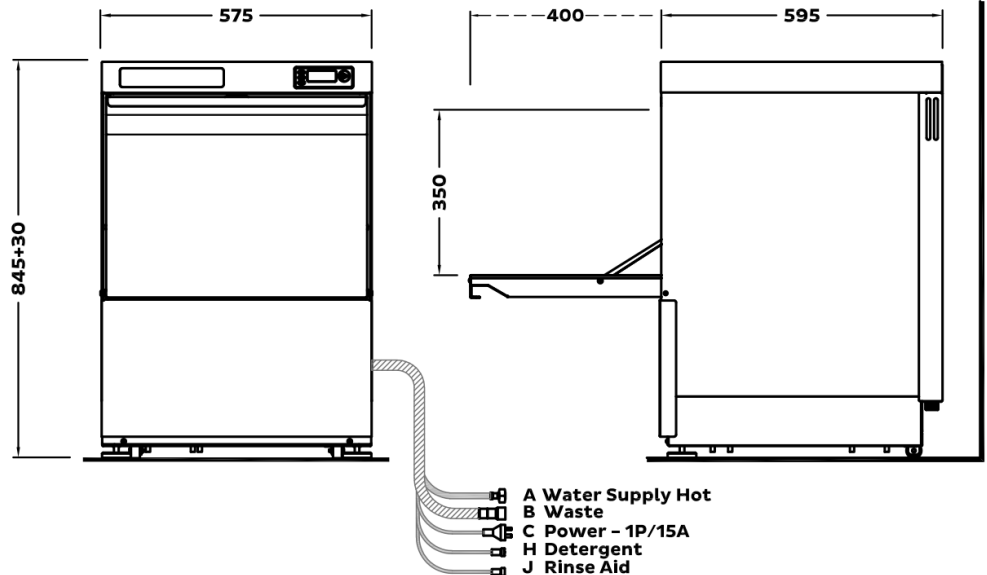

### A - Hot Water\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.4 litres per cycle

### B - Waste - Pumped Drain

Connection 20mm male; drain pump outlet hose supplied (up to 25mm connection)  
Outlet Temp No greater than wash water temp (default = 60°C to 65°C)

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.37
Single Phase	240	50	25	6.37
Three Phase	415	50	15	9.00

Isolating switch must be within 1m of, and not directly behind the machine.

### Dimensions

	Machine	Packed
Width (mm)	575	620
Depth (mm)	595	675
Height (mm)	845	940
Weight (kg)	75	78
Volume (m <sup>3</sup> )		0.39

### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

\* Suitable for connection to cold inlet water. To optimize productivity when operating on cold water connect to 1p/25A or 3p/15A.

Refer to operator manual for installation instructions.