



Refrigerated Undercounter - 1 Glass Door

Product Information:

- Adjustable digital temperature control (from -2°C 8°C)
- Fan assisted cooling
- Protective coating on refrigeration coil to help prevent corrosion
- · Environmentally friendly R600a Hydrocarbon refrigerant
- Two adjustable shelves and base shelf included
- Double glazed heated glass door for exceptional display and minimal condensation
- CFC free polyurethane insulation
- · Supplied on adjustable feet
- 600mm depth to suit compact applications

Designed and Engineered in Australia to meet Australian Standards 24 Months on-site parts and labour warranty



Specifications

 Model
 AXR.UC.1G

 W x D x H (mm)
 595 x 600 x 840

Weight 49kg

Packed Dimensions (mm) 630 x 640 x 1055

 Packed Weight
 58kg

 Net Capacity
 77 Litres

 Operation
 -2°C - 8°C


 Refrigerant
 R600a

 Climate Class
 4

 Max Ambient
 32°C

Power 230VAC / 50Hz / 0.32kW

10A plug & lead

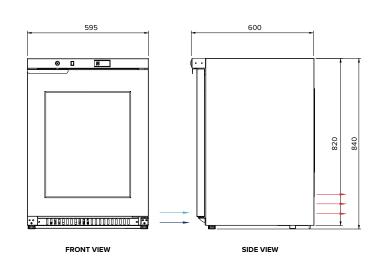

Due to continuous product research and development, the information contained herein is subject to change without notice.



www.stoddart.com.au www.stoddart.co.nz

