



AXR.UCGN.3

Refrigerated Undercounter 3 Door - 1/1GN

Product Information:

- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C - 6°C)
- Unique fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard, 840mm finish height. (Optional 900mm working height model available)
- 1/1GN shelf configuration with adjustable runners (2 shelves per door)
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Removable filter for easy cleaning
- Equipped standard with lockable castors designed for heavy-duty use
- 2 and 4 door models also available, with glass or solid doors




Designed and Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty

Optional Accessories:

- 1/1GN shelf with runners (AXR.UCGN.SHELFKIT)

Specifications

Model	AXR.UCGN.3
W x D x H (mm)	1795 x 700 x 840
Weight	122kg
Packed Dimensions (mm)	1825 x 730 x 880
Packed Weight	146kg
Net Capacity	276 Litres
Operation	0°C - 6°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	3.74kWh/24hr
Max Ambient	40°C
Total Connected Load	0.38kW
Electrical Connection	230VAC / 50Hz / (10A plug & lead)

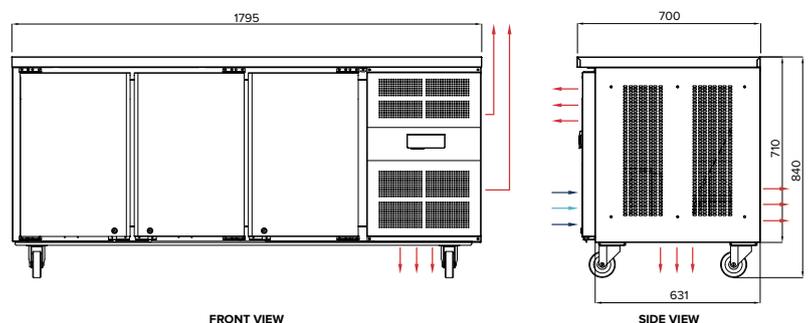

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: C - 19/09/2023 - 01

www.stoddart.com.au

www.stoddart.co.nz

