MENUMASTE Commercia



Model DEC14E2 shown

Heavy Volume This category of microwave is ideal for...

Applications:

- Convenience stores
- Bakery cafes
- Kiosks

Defrost:

- Defrosts most frozen food products

Heavy Volume

Menumaster Commercial Microwave Model DEC14E2

Power Output

- 1400 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- See-through tempered glass outer window and lighted interior for monitoring without opening the door.
- Ample 17 liter (.6 cubic ft.) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- Limited 3 year warranty.
- ETL Listed.






800-233-2366

AIA File #:

Menumaster Commercial Microwave Model DEC14E2 Heavy Volume

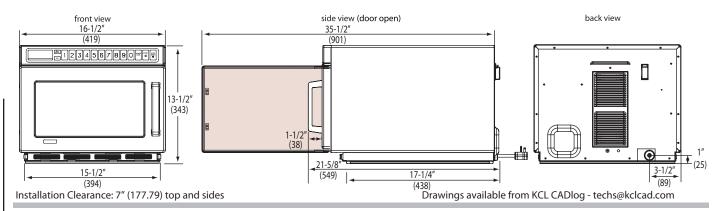

Specifications	[]			Specifications
Model	DEC14E2 UPC Code 719881159300		881159300	Commercial microwave 10 touch pad control panel shall be
Configuration	Countertop			programmable with the ability to program up to 100 menu
Control System	Touch			items and shall have automatic cooking capability for up to two portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1400 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass outer window and a grab and pull handle with a 90° + opening for easy access. An interior light shall facilitate monitoring with- out opening the door. The large 17 liter (.6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable,
Programmable Control Pads	10			
Settings Programmable	100			
Max. Cooking Time	60:00			
Power Levels	11			
Defrost	Yes, power level 2			
Time Entry Option	Yes			
Microwave Distribution	Double rotating antenna, top and bottom			
Magnetrons	2			
Display	LED			
Stackable	Yes			
Stage Cooking	Yes, 4			
Interior Light	Yes			
Door Opening	Grab and pull handle			
Signal	Adjustable, end of cycle			
Air Filter	Yes, removable with clean filter reminder			cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean
Multiple Portion Setting	Yes, up to 2 portions			filter" reminder feature. Microwave oven shall comply with
Exterior Dimensions	H 343 (13 ½″)	W 419 (16 ½″)	D** 549 (21 5⁄8″	standards set by the U.S Department of Health and Human
Cavity Dimensions	H 171 (6 ¾")	W 330 (13")	D 305 (12")	Services, ETL for safety.
Door Depth	940mm (37″), 90°+ door open			
Usable Cavity Space	17 liter (.6 cubic ft.)			
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel with sealed-in ceramic shelf			Warranty
Power Consumption	2300 W, 10.0 A			Limited 3 year warranty: Year 1 - parts, labor, and travel are covered.
Power Output*	1400 W* Microwave			Years 2 - 3 - magnetron tube (parts only) are covered.
Power Source	230V, 50 Hz, 16 A single phase			
Plug Configuration / Cord	CEE 7/7 "Schuko" 1.7m (5' 6")			
Frequency	2450 MHz			
Product Weight	30 kg (67 lbs.)			
Ship weight (approx.)	33 kg (73 lbs.)			Intertek N11942
Shipping Carton Size	L 625 (24 ⅔")	W 556 (21 1⁄8")	D 473 (18 5⁄8")	

AIA File #:

Measurements are in millimeters * IEC 60705 Tested

** Includes handle




225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A. Form # ACRR0929 Rev. 9/10

ACP commitment to quality may mean a change in specification without notice.

319-368-8120

Fax: 319-368-8198



© 2009 ACP Inc.™

800-233-2366

Product of the U.S.A.