

TECHNICAL SPECIFICATION SHEET FOR

Icematic CS Series Ice Maker



CS30 Ice cubes 35mm x 37mm x H 32mm, 20g

- **34kg** daily production rate
- **11.5kg** storage bin capacity
- 35mm x 37mm x H 32mm, 20g ice cubes
- **28** ice cubes per cycle
- 2.58 litres per hour water consumption
- Air cooled condensing unit
- Spray system technology to produce patented pure, clear and transparent ice cubes
- Easy to use control - ON / OFF switch and ice size regulation adjustment
- Bin sensor stops ice production when the bin is full
- Large capacity storage bin
- Easy access internal bin pan for easy clean
- Stainless steel external body
- Front ventilation for improved yield even in critical install
- Water drain raised with side discharge
- Moffat IM101000 single stage triple action filtration, including head and brass fitting

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

TECHNICAL SPECIFICATION SHEET FOR

Icematic CS Series Ice Maker CS30

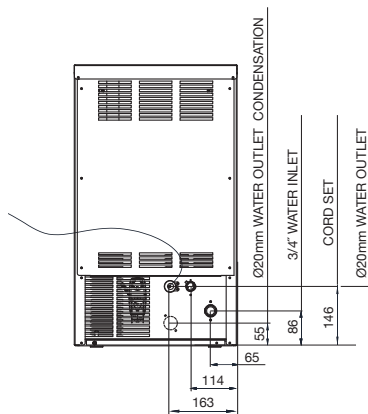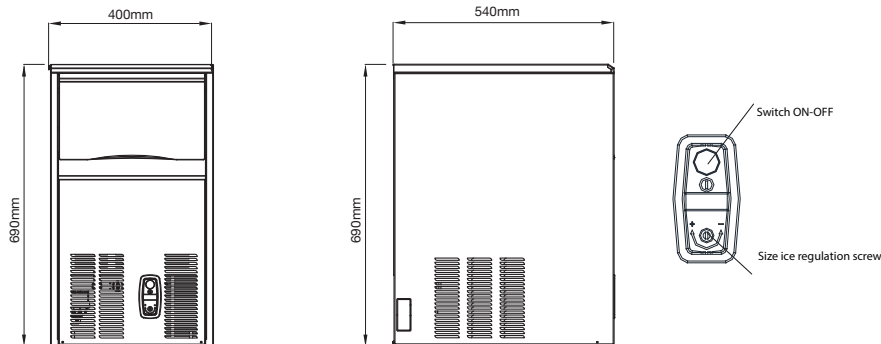

Ice production per 24 hours

| | | Water temperature | | | | |
|---------------------|-----|-------------------|-----|-----|-----|----|
| | | 32° | 21° | 15° | 10° | |
| Ambient temperature | 10° | 29 | 32 | 34 | 36 | kg |
| | 21° | 27 | 30 | 32 | 34 | kg |
| | 32° | 22 | 24 | 26 | 28 | kg |
| | 38° | 19 | 21 | 22 | 23 | kg |


CS30

Dimensions

Width: 400mm
Height: 690mm
Depth: 540mm
Nett weight: 33kg
Packed weight: 44kg

Ice cube production dimension

Ice: 35mm x 37mm x H 32mm, 20g



Water consumption

Air cooled version: 2.58 litres per hour

Electrical rating

Air cooled version: 220-240V, 1P+N+E, 50Hz, 470W, 10A cordset fitted

Refrigerant type

R134a

Installation distance from wall

- rear 150mm
- right 150mm
- left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R 3/4"

Cold water (5-35°C)

Pressure (1-5 bar)

Water outlet connection: Ø 20mm



moifat.com.au
moifat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsals@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Rolleston
Christchurch 7675
Telephone 03-983 6600
Facsimile 03-983 6660
sales@moffat.co.nz

Auckland
Telephone 09-574 3150
sales@moffat.co.nz

Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.ICE.S.1701

