


0

PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Inbuilt safety features freeze cycle back up timer, defrost back up. low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination. protection
- Durable stainless steel exterior.
- Fasily accessible and cleanable air filters reduce costly
- Exceptionally hard crystal clear cubes that melt slowly.
- Auto rinse and flush cycle.

TECHNICAL DRAWING

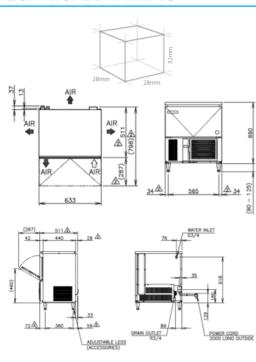



For free 6 month extended warranty. register online within 4 weeks of purchase date. hoshizaki.com.au











PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 32kg @21°C Air temp; 15°C Water Approx. 27kg @32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 15kg (Bin Control Setting Approx.8 kg)
Freeze Cycle Time	Approx. 22 Min
Ice Production / cycle	Approx. 0.67kg/ 30 pcs
Dimensions	633mm (W) x 511mm (D) x 780mm (H) (Includes 90mm-125mm Legs)
Cooling	Air
Weight Net/Gross (kg)	48/56
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 2.4A Rated: 2.4A Starting: 13A
Refrigerant Charge	R134a / 160g
Operating Conditions:	
Ambient Temp	1-40°C
Water Supply Temp	5-35°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 330W (Power Factor: 57%)
Water Consumption / 24hrs	Approx. 0.12m3/d(AT. 21°C; WT 15°C)

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- · Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

^{*}Refer to manual for full installation & maintenance requirements.